






IAM CHASING MOMENTS



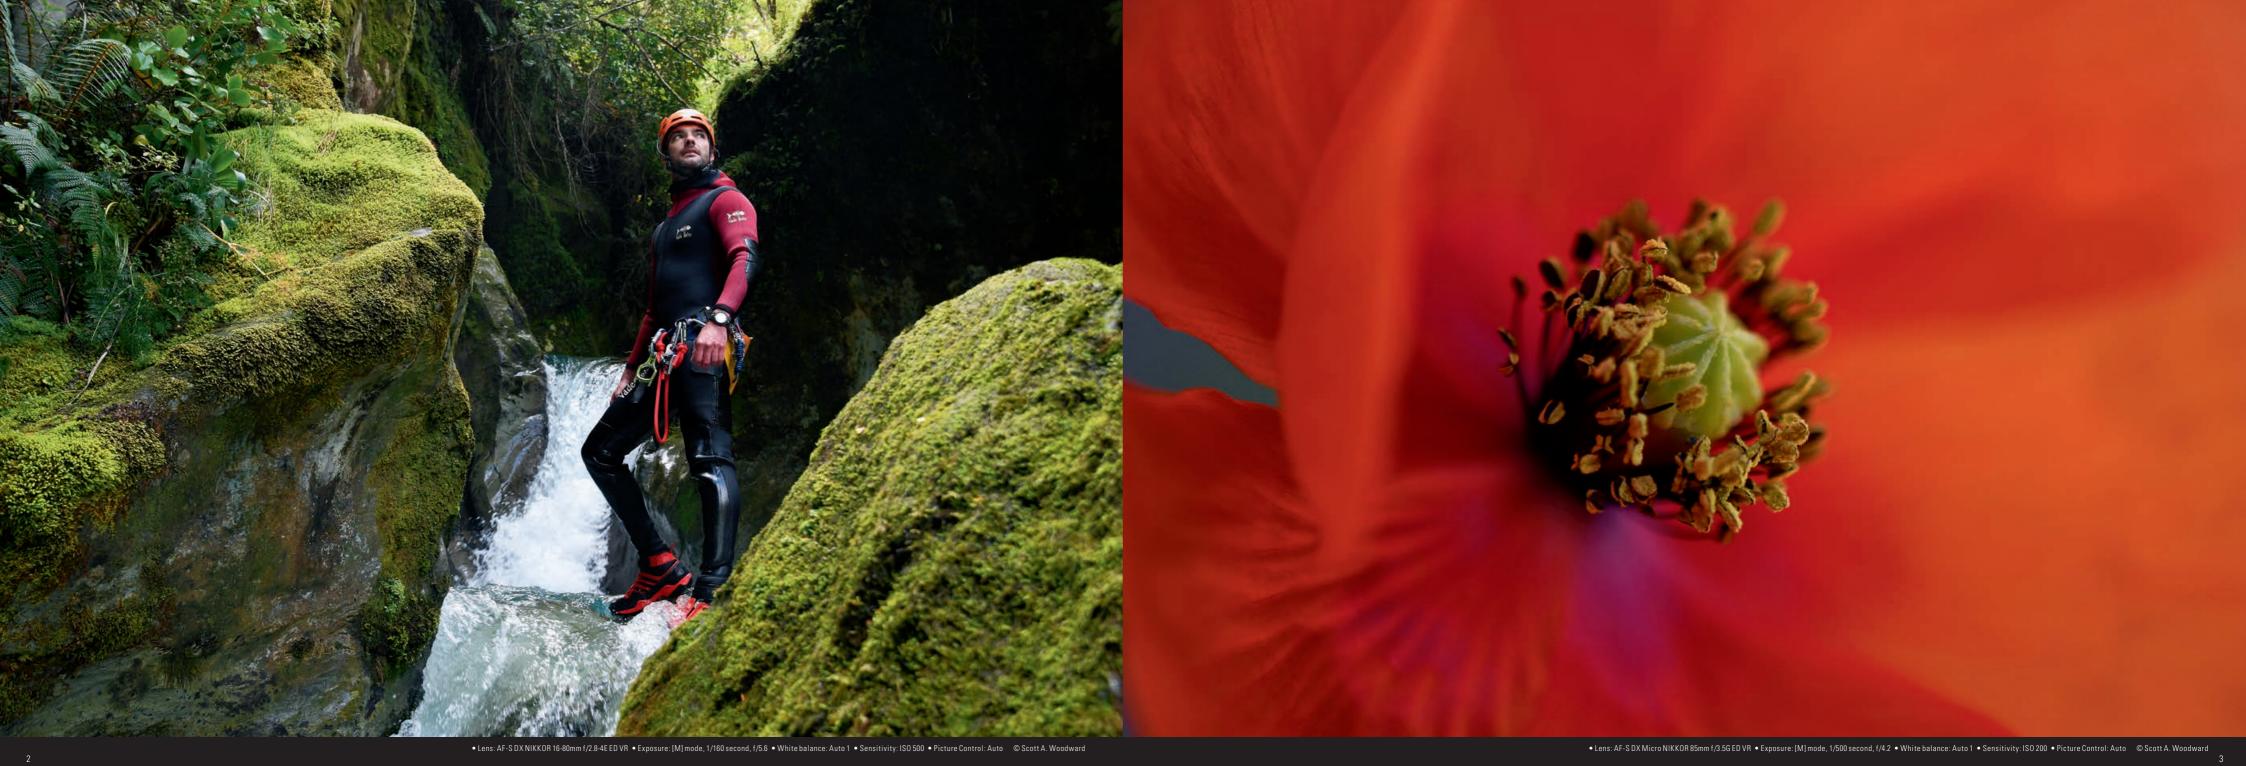







CLASS-LEADING IMAGE QUALITY IN AN AGILE BODY



What if the superior image quality of the D500, Nikon's DX flagship D-SLR camera, was made even more accessible? The new D7500 employs the same CMOS sensor, EXPEED 5 image-processing engine and 180K-pixel RGB sensor used in the D500, but packs them into a more compact and lightweight body. It gives you total confidence when shooting under harsh lighting conditions or capturing fast and erratically moving subjects. Take your passion to the next level with the D7500.

7



Sharpen your creativity in more diverse scenarios

Powerful EXPEED 5 image-processing engine for superb image quality

Nikon's powerful EXPEED 5 image-processing engine handles data from the D7500's image sensor speedily, enabling the camera to achieve continuous shooting speeds of approx. 8 fps and record 4K UHD video at 30p. Noise is dramatically reduced while details are preserved, even at high ISO settings, meaning

that subtle tonal gradations can be reproduced more smoothly in your images and movies.





Nikon DX-format CMOS sensor with 20.9 effective megapixels — the ideal balance between resolution and reduced noise at high sensitivities

The D7500 employs the same CMOS image sensor used in the Nikon DX flagship model D500, offering 20.9 effective megapixels. It strikes an optimal balance between image resolution and low-noise performance, delivering exceptional image quality even at high ISO settings. Designed without a low-pass filter to achieve even higher definition, it unlocks the full potential of your NIKKOR lenses, allowing the D7500 to produce amazingly sharp, crisp images.



Dramatically extended shooting possibilities standard ISO sensitivity from 100 to 51200, expandable to Hi 5 (equivalent to ISO 1640000)

The D7500 has an extremely wide ISO sensitivity range of 100 to 51200, and even at higher sensitivities it achieves consistently sharper images with lower noise. You can also lower the ISO sensitivity down to Lo 1 (ISO 50 equivalent) or raise it up to Hi 5 (ISO 1640000 equivalent). Aided by the camera's precise low-light AF performance, it's now even easier to capture subjects in dark scenes.



ISO 3200

Tune images just the way you want them — **Picture Control system**

Nikon's original Picture Control system offers an easy way to take creative control over your images. You can select one of eight Picture Controls according to your creative intentions including Auto Picture Control, newly introduced in the D7500. If you want to give your images a



more specific look, you can adjust parameters such as sharpness, clarity, contrast and brightness. It's also possible to register edited profiles as custom Picture Controls, and share the files with friends by sending them via email.



Images automatically adjusted to suit each scene — Auto Picture Control

The D7500 is newly equipped with Auto Picture Control, enabling it to give your images a more desirable look according to each scene's characteristics, without the need for retouching. Using subject information precisely detected by the camera's Advanced Scene Recognition System, Auto Picture Control fine-tunes the tone curve, color, sharpness and clarity of Standard Picture Control. As a result, skin tones are rendered softer for portrait images, while blue skies and verdant greens are rendered more vibrantly for landscape shots. What's more, Auto



maintains a consistent look across multiple images when using continuous shooting, even when there are small variations in brightness or angle between each frame.

• Lens: AF-P DX NIKKOR 70-300mm f/4.5-6.3G ED VR • Exposure: [M] mode, 1/640 second, f/5.6 • White balance: Auto 1 • Sensitivity: ISO 1000 • Picture Control: Auto © Scott A. Woodward

Shoot moving subjects with greater precision

Freeze the decisive moment — continuous shooting at approx. 8 fps with extended buffer capacity

Capturing fleeting moments of motion depends on the speed and duration of a camera's continuous shooting capability — and the D7500 doesn't disappoint. The rapid processing power of EXPEED 5 and an increased buffer size enable it to shoot at up to approx. 8 fps*, for approx. 50 frames (14-bit lossless compressed RAW) or 100 frames (JPEG fine, Large) at a time. The D7500's fast shooting speed and agile DX body make for a powerful combination, helping you capture subjects at their most dramatic and dynamic — even in challenging environments.

*Frame rates assume continuous-servo AF, manual or shutter-priority auto exposure, a shutter speed of 1/250 s or faster, and other settings

Acquire and maintain focus on your subject — versatile 51-point AF system


The D7500's autofocus system gives you the confidence to keep pace with fast-moving action and shoot creatively in a broad range of scenes. It employs a Multi-CAM 3500 II autofocus sensor module, with 51 focus points covering a wide area of the frame, including 15 cross-type sensors offering higher detection strength, and one center point that's compatible with f/8. The newly added group-area AF mode, highly praised by professional users, utilizes five AF points like a net to keep fast, erratically moving and low-contrast subjects in sharp focus. In auto-area AF, face detection performance is enhanced thanks to the camera's Advanced

Scene Recognition System working with its 180K-pixel RGB sensor. AF detection is available down to -3 EV, making it possible to capture subjects even under low-contrast moonlight. And you can ensure even greater focusing accuracy by using the D7500's automated AF finetune function, which lets you adjust the precision of each of your lenses easily.



Group-area AF mode

180K-pixel RGB sensor significantly enhances Advanced Scene Recognition System



180K-pixel RGB sensor

Just like the D500, the D7500 employs a 180K-pixel RGB sensor, giving it greater command over each scene you shoot. The sensor's hugely increased pixel count enhances the accuracy of various auto controls such as autofocus, auto exposure, auto

white balance and Active D-Lighting. When using auto-area AF, it strengthens face detection performance in scenes involving smaller faces. It also underpins the D7500's new flicker reduction function, which improves consistency when shooting still images under artificial light sources.

Flicker reduction function minimizes exposure variation

Artificial light sources such as fluorescent or mercury vapor lighting tend to produce flickering, which can cause exposure variations in some of your images. The D7500's flicker reduction function for still images helps avoid this effect. It does this by detecting the peak brightness level and automatically shifting the release timing slightly, giving you stable exposures even during continuous shooting*.

*Continuous shooting speed may be decreased.



You can choose to display FLICKER icon in the viewfinder when flicker is detected (conceptual image shown)



Expand possibilities in a range of environments

Shoot creatively from more camera positions — touch-operation, tilting 8-cm/3.2-in. monitor

The D7500's tilting LCD monitor lets you shoot from a wider range of angles with ease, giving your creative instincts free rein. It makes macro photography from low-angle positions more convenient, and gives you a clear view of the frame when shooting night skies with the camera mounted on a tripod. The touch-panel display brings further benefits, allowing you to focus and release the shutter by touch in live view shooting, and adjust focus in video. It also permits you to review images at high speed, using the intuitive frame advance bar in playback mode.



Agile camera body with comprehensive sealing

The D7500 offers a unique balance of comfort and reliability. Its monocoque structure, made from high-stiffness carbon fiber reinforced thermoplastic, gives it a slimmer body with a deep grip that's easier to hold, while weighing just approx. 640 g/1 lb 6.6 oz (body only). Comprehensive weather sealing is applied to the camera body to prevent dust and water droplets from damaging the internal components, for added peace of mind.



Long battery life lets you explore your passion for photography uninterrupted

The D7500 manages power efficiently, so you can stay focused on your shooting without having to worry about changing batteries. Approx. 950 shots* are available on a single charge of the new EN-EL15a Rechargeable Li-ion Battery. Video recording is possible for approx. 80 min*. An optional EH-5c AC Adapter (with EP-5B Power Connector) can also be used as a power source for longer shoots.

*Based on CIPA Standards.

EN-EL15a Rechargeable Li-ion Battery

Durable shutter unit tested for 150,000 cycles



The D7500 was designed with continuous shooting speed in mind, but it's also built to last. Its shutter unit has been rigorously tested for 150,000 cycles while actually loaded onto the camera to ensure a high level of durability. It's also fitted with a shutter monitor function that

calculates the duration between front- and rear-curtain movements every time the shutter is released, and automatically corrects any variance.

Built-in pop-up flash extends the possibilities for lighting

When shooting in low-lit interiors or capturing a portrait at night, the D7500's built-in pop-up flash comes in handy. Its intelligent i-TTL flash control uses detailed scene analysis by the 180K-pixel RGB sensor to add just the right amount of flash each time. Optically controlled Advanced Wireless Lighting is available for up to two groups of remote units* using the built-in flash as a commander, letting you add depth and drama to images by lighting subjects from off-camera positions. But that's not all. Used in conjunction with Nikon's WR-R10 Wireless Remote Controller, the camera can also control up to three groups of optional SB-5000 Speedlights simultaneously via radio. Wireless lighting with radio control expands the creative possibilities even further, letting you fire flash units even when they're out of view, behind obstacles or in bright sunlight. Advanced Wireless Lighting using both optical (up to two groups) and radio control (up to three groups) at the same time is also possible with the D7500. It empowers you to get even more ambitious with the way you control light — and the results will speak for themselves.

*SB-5000, SB-700, SB-500 and SB-R200 (all optional).

• Lens: AF-S DX NIKKOR 16-80mm f/2.8-4E ED VR • Exposure: [M] mode, 1/10 second, f/14 • White balance: Auto 1 • Sensitivity: ISO 100 • Picture Control: Auto © Scott A. Woodward



Get your creative world in motion

High-quality 4K UHD video

The D7500 lets you record up to 29 min. 59 s in sumptuous 4K UHD/30p or Full HD video. And that's not all: movies can be recorded in MP4 as well as the conventional MOV format, allowing easy playback on smart devices. Harnessing the superior optical performance of NIKKOR lenses, the D7500 depicts scenes in breathtaking detail. Its powerful EXPEED 5 image-processing engine renders movies with low noise while maintaining sharpness, even at high ISO sensitivities. Shooting in Flat Picture Control gives you greater flexibility over color grading in post-production. It's also possible to record uncompressed, 8-bit 4:2:2 4K UHD files to an external recording device via HDMI output, while simultaneously recording to the in-camera SD memory card.



3840 × 2160: Compatible with 4K UHD

1.3×-based image area: Compatible with Full HD and HD

DX-based image area: Compatible with Full HD and HD

Note: Aspect ratio of movies is 16:9 regardless of the selected

Depict the passage of time dramatically — 4K UHD time-lapse movie

Time-lapse movies transform scenes of slow-moving clouds or the flow of a crowded city intersection into dramatic, high-speed sequences. The D7500 lets you generate 4K UHD* or Full HD time-lapse movies entirely within the camera. Its exposure smoothing function reduces unwanted flicker effects by automatically decreasing the slight exposure variance between frames when shooting with an auto exposure mode such as aperture-priority, in a situation like the transition between darkness and light at sunrise or sunset. Exposure smoothing is also available for interval timer shooting, which can record up to 9,999 shots.

Stabilize your handheld video shooting for Full HD and HD — electronic Vibration Reduction

When shooting movies handheld in Full HD or HD, the D7500's electronic Vibration Reduction function* reduces the effects of camera shake in the horizontal, vertical and rotational directions (centering on the lens). It makes it easier to capture smooth footage in situations where it isn't possible to use a tripod, or when using a single-focal-length lens without optical VR. Used together with NIKKOR's optical VR technology, the benefits are even more pronounced.

*Angle of view is slightly reduced when DX is selected for image area.

Vertical movement Horizontal movement Rotational movement

Active D-Lighting available for Full HD and HD videos

Active D-Lighting preserves details in highlights and shadows when shooting high-contrast scenes, giving your footage richer tonal gradation and a more natural brightness. Thanks to EXPEED 5, it can be applied

to both Full HD and HD movies. It comes in handy when you need to use footage straight from the camera, without making post-production adjustments.





Active D-Lighting: Off

Active D-Lighting: High

Dedicated movie menu for efficient workflow in both stills and videos

The D7500's video functions have been designed for multimedia users, who move back and forth between video and still shooting. The camera offers a dedicated movie menu that lets you change settings such

as white balance and Picture Control independently of the ones used for still photography. Because you don't need to adjust your settings again, you can switch between movies and still images quickly. For added convenience, pressing the *t* button during movie live view or movie recording gives instant access to detailed video settings.



Smooth aperture control during movie recording

The D7500 is the first D7000-series camera to allow aperture control during movie recording. Its power aperture function* makes it possible to change the aperture smoothly and quietly using the multi selector while you're recording. This convenient feature means you can change the depth of field continuously, letting you vary the amount of background or foreground blur according to your creative intentions.

*Exposure mode A and M only. Operational sound may be picked up when using the internal microphone. External microphone use recommended

Highlight display helps avoid overblown highlights

Blown-out highlights are generally undesirable in still images, but they can create much bigger problems in video. To ensure the best results when shooting movies, the D7500 has a handy feature that uses "zebra" patterns to indicate areas at risk of overexposure. This can be quickly accessed via the £ button.



Versatile sound controls

The D7500 has a built-in stereo microphone and is compatible with the optional ME-1 Stereo Microphone and ME-W1 Wireless Microphone. Microphone sensitivity levels can be adjusted in 20 increments while visually monitoring the sound level indicator during movie recording, and it's possible to monitor using commercially available stereo headphones as well. You can also set the audio frequency response: "Wide range" is ideal for capturing a broad array of frequencies, such as the bustle of a city street, while "Vocal range" is optimized for recording human speech. Wind noise reduction is also available when using the built-in microphone.



Handy, water-resistant ME-W1 Wireless Microphone (optional)



Frequency response



ME-1 Stereo Microphone (optional) attached to the D7500

^{*}Maximum recording duration of 4K UHD time-lapse movie is 3 min.

Explore new horizons in still and video shooting

NEF (RAW) processing

BEE Select image(s)

Speed up post-production editing — in-camera RAW batch processing

The D7500 is the first Nikon D-SLR to offer in-camera RAW batch processing — an invaluable function when you need to process large numbers of RAW images, for instance when using interval timer shooting to create a time-lapse movie. It is also now possible to process images while retaining the parameters for white balance, Picture Control, high ISO NR, vignette control and Active D-Lighting that were used when shooting each image. This can greatly shorten post-production time compared to using a computer.





The D7500 gives you greater control when making images with the camera's multiple exposure function, making it easier to fulfill your creative vision. It's possible to combine up to 10 images using options including "Lighten" and "Darken," but the D7500 also lets you save all the single frames alongside the composite image. For still-life images, you can now view a partially overlaid preview of the final composite during the shooting process, as well

as seeing the individual exposures. If you aren't happy with the most recent frame, you can delete it and reshoot to achieve your desired effect.

An easy way to give your images a unique look — Special Effect modes

The D7500 incorporates a number of visual effects that can be applied instantly to make your stills or videos more eye-catching. In live view shooting, the effects are displayed in real time, allowing you to see what the captured image will look like. Special Effects on the D7500 include night vision, super vivid, pop, photo illustration*1, toy camera effect, miniature effect*2, selective color, silhouette, high key and low key.



- *1 Movies shot in this mode play back like a slide show made up of a series of stills.
- *2 Movies shot in this mode play back at high speed.

NIKKOR lenses unlock the full imaging potential of the D7500

NIKKOR lenses are trusted and praised by professionals and advanced amateurs all over the world. Drawing on a wealth of accumulated Nikon technology, they ensure high resolution even in the peripheral areas of the frame, exceptional rendering of point light sources, and beautiful image blur that conveys a natural sense of depth. NIKKOR lenses truly bring out the full potential of the D7500.





- Lens: AF-S DX NIKKOR 10-24mm f/3.5-4.5G ED Exposure: [A] mode, 10 seconds, f/14 White balance: Auto 1 Sensitivity: ISO 200

AF-S DX NIKKOR 10-24mm f/3.5-4.5G ED

Explore the extremes of photography with the ultra-wide-angle coverage of this practical zoom lens. With the widest end of 15 mm^{*1} covering a 109° angle of view, it delivers dramatic perspectives to give your photography a creative edge. Close-up shooting capability and minimized distortion further add to its appeal



AF-S DX NIKKOR 16-80mm f/2.8-4E ED VR

A remarkably lightweight 5× normal zoom lens with a maximum aperture of f/2.8 at the maximum wide-angle position. This highperformance lens adopts the latest technologies, such as Nano Crystal Coat, fluorine coat and electromagnetic diaphragm — all firsts for a DX-format lens. Vibration Reduction (VR) provides an effect equivalent to a shutter speed 4.0 stops*2 faster in NORMAL mode. With excellent rendering and superior mobility, it's a versatile travel companion.

AF-S DX NIKKOR 18-140mm f/3.5-5.6G ED VR

The powerful, approx. 7.8× zoom of this lens covers a broad focallength range from wide-angle to telephoto. Its superb optical performance produces spectacular high-definition images. Vibration Reduction (VR) provides an effect equivalent to a shutter speed 4.0 stops*2 faster, effectively compensating for camera shake. It's ideal for capturing diverse scenes of everyday life, or when traveling with a single lens.



AF-S DX Micro NIKKOR 85mm f/3.5G ED VR

Compact and lightweight, this lens also incorporates Vibration Reduction (VR) with an effect equivalent to a shutter speed 3.0 stops*2 faster, which enables steadier handheld shooting. With a great working distance and focusing capability from infinity to life-size (1x), it gives you amazing sharpness and background bokeh for close-up subjects, portraits, natur images and more.

AF-S NIKKOR 300mm f/4E PF ED VR

This telephoto lens is the first in the NIKKOR lineup to employ a PF (Phase Fresnel) lens element, achieving an outstandingly compact and light body while effectively minimizing chromatic aberration. An ED glass element and Nano Crystal Coat further ensure high optical performance. Vibration Reduction (VR) provides an effect equivalent to a shutter speed 4.5 stops*2 faster in NORMAL mode. It's ideal for capturing a wide range of subjects, from sports to wildlife and landscapes.



- *2 Based on CIPA Standards. The value is achieved when: DX-format lenses are attached to a DX-format digital SLR camera, FX-format compatible lenses are attached to an FX-format digital SLR camera, and zoom lenses are set at the maximum telephoto position.











- Lens: AF-S NIKKOR 35mm f/1.8G ED Exposure: [M] mode. 1/250 second. f/8 White balance: Auto 1

Radio-controlled Advanced Wireless Lighting using versatile, high-output Nikon SB-5000 Speedlight




The SB-5000 is the first Nikon Speedlight that can be controlled via radio, pushing the boundaries of wireless multi-flash shooting. With the WR-R10 Wireless Remote Controller attached to the D7500 as a commander, Advanced Wireless Lighting is available for up to six groups of SB-5000s, even when they're out of view, behind obstacles or in bright ambient light. Advanced Wireless Lighting using both light and radio is possible with the D7500

as well, while the SB-5000 can also be used to control up to three groups via light. The SB-5000's cooling system prevents the flash panel from overheating when shooting consecutive bursts. As a result, it can fire continuously for longer than conventional models, without flash cool-down time between bursts, while maintaining a powerful output at the guide number of 41m/134.5 ft*.

*ISO 100, at 35 mm zoom head position, in DX format, standard illumination pattern.



With the WR-R10 attached to the D7500 as a commander, three SB-5000 Speedlights are triggered wirelessly via radio.

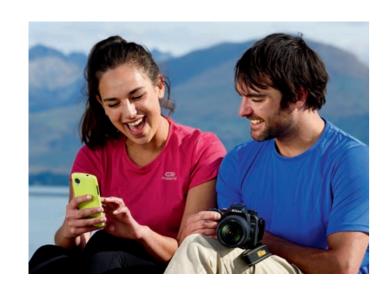

Share your most impressive images easily — built-in Bluetooth® and Wi-Fi® connectivity

The pleasure of a beautiful image becomes even greater when you share the experience with others. The D7500 can maintain a constant connection to a smart device* with the SnapBridge application installed (available as a free download), via Bluetooth[®]. You can automatically transfer the images you take to your smart device, upload them automatically to NIKON IMAGE SPACE, and use the smart device to browse images stored in the camera. You can also embed those images with location and date/time information from your smart device. Using Wi-Fi[®], it's possible to transfer images and movies by selecting the files in the app, as well as control shooting remotely. SnapBridge dramatically enhances the experience of taking and sharing images with a digital SLR camera.

*Compatible with iPhone®, iPad®, iPod touch® or smart devices running on the Android™ operating system.

Note: The camera's built-in Wi-Fi® capability can only be used when the SnapBridge app is installed on a compatible smart device.



Still images and movie management software — ViewNX-i (free download)

ViewNX-i is Nikon's free software for browsing and editing JPEG, RAW and movie files, as well as RAW files edited with Capture NX-D. It incorporates ViewNX-Movie Editor, which can be used to edit movies, including 4K UHD footage. Access to various web services is also available.



RAW image-processing software with auto retouch brush — Capture NX-D (free download)

Capture NX-D, Nikon's free software for processing its original RAW (NEF/NRW) files, comes with an auto retouch brush that lets you remove dust spots on an image easily. It can also be used to adjust parameters such as exposure compensation, white balance, Picture Control and unsharp mask. JPEG and TIFF files are also compatible.



Camera Control Pro 2 lets you remotely control the camera from a computer via wired connection. It supports Windows 64-bit (native) and is compatible with the advanced functions included in the D7500, allowing you to enable/disable flicker reduction during still shooting, and turn Active D-Lighting for movies and electronic VR on/off. In-camera editing of IPTC information is also possible. You can use shortcuts to control settings such as exposure mode, exposure compensation, shutter speed and aperture. Interval timer shooting in bulb mode is also supported, for more flexibility in remote shooting.





PARTS AND CONTROLS







- Shutter-release button
- 2 Power switch
- 3 AF-assist illuminator/Self-timer lamp/ Red-eye reduction lamp
- Stereo microphone
- 6 Lens mount
- 6 Mirror
- 7 Lens mounting mark
- 8 Flash mode button/Flash compensation button
- Infrared receiver
- Bracketing button
- 11 Cover for USB, HDMI and external microphone connectors
- Lens release button
- AF-mode button
 Cover for accessed
- Over for accessory terminal and headphone connector
- Focus-mode selectorFn2 button
- 16 Fn2 bu
- Fn1 button


- Sub-command dial
- Playback button
 Polete button/Fo

Eye sensor

- Delete button/Format buttonViewfinder eyepiece
- - ② Diopter adjustment control ② AE/AF lock button
 - 23 Main command dial 26 Multi selector
 - OK button
 - Focus selector lock
 Memory card access lamp
 - i button
 - Memory card slot coverLive view selector
 - 3 Live view button
 - Speaker
 - Tilting monitorInfo button
 - Thumbnail button/Playback zoom out button/Metering button

- Playback zoom in button/Image quality/size button
- Help button/White balance button
 Menu button
- Mode dial
- Release mode dial
- 43 Built-in flash
 44 Control panel
- 45 Movie-record button
 46 ISO sensitivity button/Format button
- Exposure compensation buttonEyelet for camera strap
- 49 Focal plane mark
- Accessory shoe (for optional flash unit)Mode dial lock release
- 3 Release mode dial lock release
- Battery-chamber cover latchBattery-chamber cover
- 5 Power connector cover
- Tripod socket

SYSTEM CHART

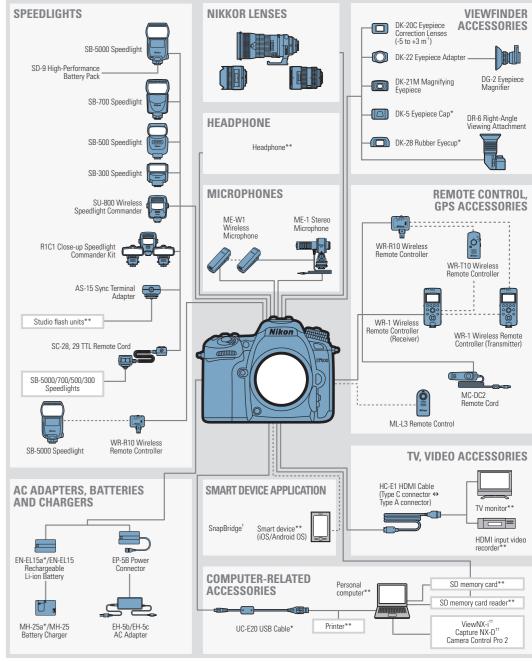

^{*}Supplied accessories **Non-Nikon products † Can be downloaded from the application store of each smart device (free). †† Can be downloaded from Nikon website (free).

Nikon Digital SLR Camera D7500 Specification

| Type of camera | Single-lens reflex digital camera |
|------------------------------|--|
| Lens mount | Nikon F mount (with AF coupling and AF contacts) |
| Effective angle of view | Nikon DX format; focal length in 35 mm [135] format equivalent to approx. 1.5× that of lenses with FX |
| | format angle of view |
| Effective pixels | 20.9 million |
| Image sensor | 23.5 × 15.7 mm CMOS sensor |
| Total pixels | 21.51 million |
| Dust-reduction system | Image sensor cleaning, Image Dust Off reference data (Capture NX-D software required) |
| Image size (pixels) | • DX (24×16) image area: 5568 × 3712 (L: 20.6 million), 4176 × 2784 (M: 11.6 million), 2784 × 1856 (S: 5.1 million) • 1.3× (18×12) image area: 4272 × 2848 (L: 12.1 million), 3200 × 2136 (M: 6.8 million), 2128 × 1424 (S: 3 million) • Photographs with image area of DX taken during movie recording: 5568 × 3128 (L: 17.4 million), 4176 × 2344 (M: 9.7 million), 2784 × 1560 (S: 4.3 million) • Photographs with image area of 1.3× taken during movie recording: 4272 × 2400 (L: 10.2 million), 3200 × 1800 (M: 5.7 million), 2128 × 1192 (S: 2.5 million) • Photographs taken during movie recording at a frame size of 3840 × 2160 (3.2 million) |
| File format | NEF (RAW): 12 or 14 bit, lossless compressed or compressed • JPEG: JPEG-Baseline compliant with fine (approx. 1:4), normal (approx. 1:8), or basic (approx. 1:16) compression; optimal quality compression available • NEF (RAW)+JPEG: Single photograph recorded in both NEF (RAW) and JPEG formats |
| Picture Control System | Auto, Standard, Neutral, Vivid, Monochrome, Portrait, Landscape, Flat; selected Picture Control can be modified; storage for custom Picture Controls |
| Storage media | SD (Secure Digital) and UHS-I compliant SDHC and SDXC memory cards |
| File system | DCF 2.0, Exif 2.31, PictBridge |
| Viewfinder | Eye-level pentaprism single-lens reflex viewfinder |
| Frame coverage | DX (24×16) image area: Approx. 100% horizontal and 100% vertical 1.3×(18×12) image area: Approx. 97% horizontal and 97% vertical |
| Magnification | Approx. 0.94× (50 mm f/1.4 lens at infinity, -1.0 m ⁻¹) |
| Eyepoint | 18.5 mm (-1.0 m ⁻¹ ; from center surface of viewfinder eyepiece lens) |
| Diopter adjustment | -2 to +1 m ⁻¹ |
| Focusing screen | Type B BriteView Clear Matte Mark II screen with AF area brackets (framing grid can be displayed) |
| Reflex mirror | Quick return |
| Lens aperture | Instant return, electronically controlled |
| Compatible lenses | Compatible with AF NIKKOR lenses, including type G, E and D lenses (some restrictions apply to PC lenses) and AI-P NIKKOR lenses and non-CPU AI lenses (M mode only); IX-NIKKOR lenses, lenses for the F3AF, and non-AI lenses can not be used The electronic rangefinder can be used with lenses that have a maximum aperture of f/8 of faster (the electronic rangefinder supports the center focus point with lenses that have a maximum aperture of f/8 or faster) |
| Shutter type | Electronically controlled vertical-travel focal-plane mechanical shutter; electronic front-curtain shutter available in mirror up release mode |
| Shutter speed | 1/8000 to 30 s in steps of 1/3 or 1/2 EV, bulb, time, X250 |
| Flash sync speed | X=1/250 s; synchronizes with shutter at 1/320 s or slower (flash range drops at speeds between 1/250 and 1/320 s) |
| Release modes | S (single frame), CL (continuous low speed), CH (continuous high speed), Q (quiet shutter-release), Qc (quiet continuous shutter-release), \mathfrak{S} (self-timer), Mup (mirror up) |
| Approximate frame | CL: 1 to 7 fps, CH: 8 fps |
| advance rate | Frame rates assume continuous-servo AF, manual or shutter-priority auto exposure, a shutter speed of 1/250 s or faster, release selected for custom setting a1 (AF-C priority selection), and other settings at default values |
| Self-timer | 2 s, 5 s, 10 s, 20 s; 1 to 9 exposures at intervals of 0.5, 1, 2 or 3 s |
| Remote control modes (ML-L3) | Delayed remote, quick-response remote, remote mirror-up |
| Exposure metering system | TTL exposure metering using RGB sensor with approx. 180K (180,000) pixels |
| Exposure metering modes | Matrix: 3D color matrix metering III (type G, E and D lenses); color matrix metering III (other CPU lenses) Center-weighted: Weight of approx. 75% given to 8-mm circle in center of frame; diameter of circle can be changed to 6, 10 or 13 mm, or weighting can be based on average of entire frame Spot: Meters circle with diameter of about 3.5 mm (about 2.5% of frame) centered on selected focus point *> |

| Exposure meter coupling | F) ◆ Spot metering: 2 to 20 EV CPU |
|---|---|
| Exposure modes | Auto modes (Tauto; Sauto [flash off]); scene modes (fortrait; Iaulandscape; Fortidit; Sauto; Sauto [flash off]); scene modes (fortrait; Iaulandscape; Fortidit; Sauto; Sauto [flash off]); scene modes (fortrait; Iaulandscape; Fortrait; Iaulandscape; Iaulandscape |
| Exposure modes | So close up; ☐ night portrait; ☑ night landscape; ※ party/indoor; № beach/sow; ※ sunset; ※ dusk/dawn; → pet portrait; ☑ candlelight; ⊙ blossom; ⊙ autumn colors; № food); special effects modes (☑ night vision; Ⅵ super vivid; № por; ▷ photo illustration; Ͷ roy camera effect; ⊘ miniature effect; ✓ selective color; Ϫ silhouette; high key; low key); programmed auto with flexible program (P); shutter-priority auto (S); aperture-priority auto (A); manual (M); U1 (user settings 1); U2 (user settings 1); |
| Exposure compensation | Can be adjusted by -5 to +5 EV in increments of 1/3 or 1/2 EV in P, S, A, M, SCENE and EFFECTS modes |
| Exposure lock | Luminosity locked at detected value |
| ISO sensitivity (Recommended Exposure Index) | ISO 100 to 51200 in steps of 1/3 or 1/2 EV; can also be set to approx. 0.3, 0.5, 0.7 or 1 EV (ISO 50 equivalent) below ISO 100 or to approx. 0.3, 0.5, 0.7, 1, 2, 3, 4 or 5 EV (ISO 1640000 equivalent) abow ISO 51200; auto ISO sensitivity control available |
| Active D-Lighting | Can be selected from auto, extra high, high, normal, low or off |
| Autofocus | Nikon Advanced Multi-CAM 3500 II autofocus sensor module with TTL phase detection, fine-tuning, 51 focus points (including 15 cross-type sensors; f/8 supported by one sensor), and AF-assist illuminator (range approx. 0.5 to 3 m/1 ft 8 in. to 9 ft 10 in.) |
| AF detection range | -3 to +19 EV (ISO 100, 20°C/68°F) |
| Lens servo | Autofocus (AF): Single-servo AF (AF-S): continuous-servo AF (AF-C): auto AF-S/AF-C selection (AF-A); predictive focus tracking activated automatically according to subject status • Manual focus (M): Electronic rangefinder can be used |
| Focus point | Can be selected from 51 or 11 focus points |
| AF-area modes | Single-point AF; 9-, 21- or 51-point dynamic-area AF, 3D-tracking, group-area AF, auto-area AF |
| Focus lock | Focus can be locked by pressing shutter-release button halfway (single-servo AF) or by pressing |
| Built-in flash | 智, 变, 冬, ♥, 圆, 爽, ಳ, VI, POP, 肽, 臬: Auto flash with auto pop-up P, S, A, M, Ħ: Manual pop-up with button release |
| Guide number | Approx. 12/39, 12/39 with manual flash (m/ft, ISO 100, 20°C/68°F) |
| Flash control | TTL: i-TTL flash control using RGB sensor with approx. 180K (180,000) pixels is available with built-in flash; i-TTL balanced fill-flash for digital SLR is used with matrix, center-weighted and highlight-weighted metering, standard i-TTL fill-flash for digital SLR with spot metering |
| Flash modes | Auto, auto with red-eye reduction, auto slow sync, auto slow sync with red-eye reduction, fill-flash, red-eye reduction, slow sync, slow sync with red-eye reduction, rear-curtain with slow sync, rear-curtain sync, off; auto FP high-speed sync supported |
| Flash compensation | -3 to +1 EV in increments of 1/3 or 1/2 EV |
| Flash-ready indicator | Lights when built-in flash or optional flash unit is fully charged; flashes after flash is fired at full output |
| Accessory shoe | ISO 518 hot-shoe with sync and data contacts and safety lock |
| Nikon Creative Lighting System (CLS) | i-Tt. flash control, radio-controlled Advanced Wireless Lighting, optical Advanced Wireless Lighting modeling illumination, FV lock, color information communication, auto FP high-speed sync, AF-assist for multi-area AF |
| Sync terminal | AS-15 Sync Terminal Adapter (available separately) |
| White balance | Auto (2 types), incandescent, fluorescent (7 types), direct sunlight, flash, cloudy, shade, preset manue (up to 6 values can be stored, spot white balance measurement available during live view), choose color temperature (2500 K to 10000 K), all with fine-tuning |
| Bracketing types | Exposure, flash, white balance and ADL |
| Live view modes | ♠ (photo live view), 🧏 (movie live view) |
| Live view lens servo | • Autofocus (AF): Single-servo AF (AF-S); full-time servo AF (AF-F) • Manual focus (M) |
| | Face-priority AF, wide-area AF, normal-area AF, subject-tracking AF |
| | |
| Live view autofocus | Contrast-detect AF anywhere in frame (camera selects focus point automatically when face-priority AF or subject-tracking AF is selected) |
| Live view autofocus Movie metering system | Contrast-detect AF anywhere in frame (camera selects focus point automatically when face-priority AF or subject-tracking AF is selected) TTL exposure metering using main image sensor |
| Live view autofocus | Contrast-detect AF anywhere in frame (camera selects focus point automatically when face-priority AF or subject-tracking AF is selected) |

| Frame size (pixels) and frame rate | 3840 × 2160 (4K UHD); 30p (progressive), 25p, 24p 1920 × 1080; 60p, 50p, 30p, 25p, 24p 1220 × 1080; 60p, 50p, 30p, 25p, 24p |
|---|---|
| | 1920 × 1080; 50p, 50p, 50p, 25p, 24p • 1280 × 720; 50p, 50p Actual frame rates for 60p, 50p, 30p, 25p and 24p are 59.94, 50, 29.97, 25 and 23.976 fps respectively; ★ high |
| | quality available at all frame sizes, normal quality available at all sizes except 3840 × 2160 |
| File format | MOV. MP4 |
| Video compression | H.264/MPEG-4 Advanced Video Coding |
| Audio recording format | Linear PCM. AAC |
| Audio recording device | Built-in stereo or external microphone; sensitivity adjustable |
| Movie ISO sensitivity | Mode M: Auto ISO sensitivity control (ISO 100 to Hi 5) available with selectable upper limit; |
| | Modes M. Adul 50 sensitivity control (ISO 100 to n 15) available with selectable upper limit, manual selection (ISO 100 to 51200 in steps of 1/3 or 1/2 EV) with additional options available equivalent to approx. 0.3, 0.5, 0.7, 1, 2, 3, 4 or 5 EV (ISO 1640000 equivalent) above ISO 51200 Modes P, S and A: Auto ISO sensitivity control (ISO 100 to Hi 5) with selectable upper limit Tell (EFFECT) mode: Auto ISO sensitivity control (ISO 100 to Hi 5) Other modes: Auto ISO sensitivity control (ISO 100 to 12800) |
| Movie Active D-Lighting | Can be selected from same as photo settings, extra high, high, normal, low or off |
| Maximum movie recording length | 29 min. 59 s |
| Other movie options | Index marking, time-lapse movies, electronic vibration reduction |
| Monitor | 8-cm/3.2-in., approx. 922k-dot (VGA) tilting TFT touch-sensitive LCD with 170° viewing angle, approx. 100% frame coverage, manual monitor brightness control and an eye-sensor controlling display on/off |
| Playback | Full-frame and thumbnail (4, 9 or 72 images or calendar) playback with playback zoom, playback zoom cropping, movie playback, photo and/or movie slide shows, histogram display, highlights, phot information, location data display, picture rating and auto image rotation |
| USB | Hi-Speed USB with Micro-B connector; connection to built-in USB port is recommended |
| HDMI output | Type C HDMI connector |
| Accessory terminal | Wireless remote controllers: WR-1 and WR-R10, Remote cord: MC-DC2, GPS unit: GP-1/GP-1A (all available separately) |
| Audio input | Stereo mini-pin jack (3.5-mm diameter; plug-in power supported) |
| Audio output | Stereo mini-pin jack (3.5-mm diameter) |
| Wireless | Standards: IEEE 802.11b, IEEE 802.11g |
| Bluetooth | Communication protocols: Bluetooth Specification Version 4.1 |
| Range (line of sight) | Approx. 10 m/32 ft without interference; range may vary with signal strength and presence or absence of obstacles |
| Supported languages | Arabic, Bengali, Bulgarian, Chinese (Simplified and Traditional), Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hindi, Hungarian, Indonesian, Italian, Japanese, Korean, Marathi, Norwegian, Persian, Polish, Portuguese (Portugal and Brazil), Romanian, Russian, Serbian, Spanish, Swedish, Tamil, Telugu, Thai, Turkish, Ukrainian, Vietnamese |
| Battery | One EN-EL15a Rechargeable Li-ion Battery |
| AC adapter | EH-5c AC Adapter; requires EP-5B Power Connector (available separately) |
| Tripod socket | 1/4 in. (ISO 1222) |
| Dimensions (W \times H \times D) | Approx. 135.5 × 104 × 72.5 mm/5.4 × 4.1 × 2.9 in. |
| Weight | Approx. 720 g/1 lb 9.4 oz with battery and memory card but without body cap; approx. 640 g/1 lb 6.6 oz (camera body only) |
| Operating environment | Temperature: 0 to 40°C/32 to 104°F; humidity: 85% or less (no condensation) |
| Supplied accessories (may differ by country or area) | EN-EL15a Rechargeable Li-ion Battery, MH-25a Battery Charger, UC-E20 USB Cable, AN-DC3 BK Camera Strap, BF-1B Body Cap, DK-5 Eyepiece Cap, DK-28 Rubber Eyepiece |
| | zzzz zz.zp, zz. zz.zaj odp, zw. o z jopioco odp, zw. zo massor z jopioco |

Windows is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries.

• This SD, SDHC and SDXC logos are trademarks of the SD-3C, LLC. • PictBridge is a trademark. • HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. • iPhone®, iPad® and iPod touch® are trademarks of Apple Inc. registered in the U.S. and/or other countries. • Android is a trademark of coopel Inc. • WirFi® and the Wi-Fi logo are trademarks or registered trademarks of the Wi-Fi Alliance® • The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Nikon Corporation is under license. • Other products and brand names are trademarks or registered trademarks of their respective companies. • Images in viewfinders, on LCDs and monitors shown in this material are simulated.

Specifications and equipment are subject to change without any notice or obligation on the part of the manufacturer. May 2017 ©2017 Nikon Corporation



WARNING

TO ENSURE CORRECT USAGE, READ MANUALS CAREFULLY BEFORE USING YOUR EQUIPMENT. SOME DOCUMENTS CAN BE DOWNLOADED FROM <u>downloadcenter.nikonimglib.com</u>.

Visit the Nikon Europe website at: www.europe-nikon.com

